


3308 AC Ten Branch Circuits With Shore, Generator, and Inverter Mains 120 VAC 60 HZ, (or 240 VAC 50 HZ)

3308 AC Ten Branch Circuits With Shore, Generator, and Inverter Mains 120 VAC 60 HZ, (or 240 VAC 50 HZ)

GENERAL FEATURES & BENEFITS

- Completely pre-wired to reduce installation time
- High accuracy rear mounted meters. Digital meters are optional.
- Panel mounted, isolated hot, neutral, and safety ground bus bars on AC breaker panels.
- Over 2000 interchangeable function labels available.
- Panel face is 1/8" corrosion resistant aluminum coated with two-part polyurethane.
- Hydraulic/magnetic, trip free Circuit Breakers.
- Voltage and Shore Cord Current: 30 AMPS, 120 VAC, 60 HZ USA is standard. Also available in 16 AMPS, 240 VAC, 50 HZ.
- Main Breakers: Shore: 30 AMP 120 VAC, 60 HZ, and 16 AMP 240 VAC, 50 HZ.
Generator: 120 VAC, 60 HZ 50 AMP two pole main breaker is standard. Inverter: 120 VAC, 60 HZ 10 AMP two pole main breaker is standard.
- Branch Circuits: Ten circuits. Available in 5, 10, 15, 20, 25, 30, 40, and 50 AMP.
- Metering: 0-150 VAC scale Voltmeter and 0-50 ACA scale Ammeter are standard. Other analog scales and digital meters available.
- Dimensions: 13 3/4" W x 8 5/8" H x 3 1/2" D

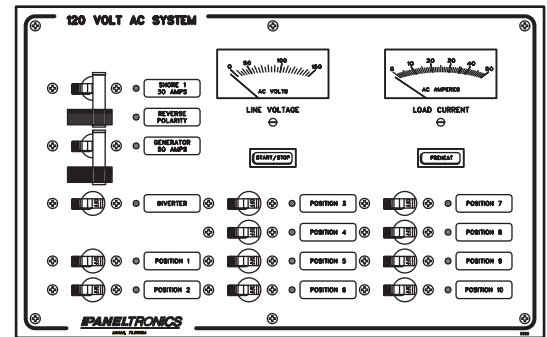

3308