

# TurboVap Series Evaporators

## Reduced Size, Noise & Power Draw



The TurboVap Series of direct expansion (DX) split-gas evaporators for boats is based on the revolutionary engineering advancements of the award-winning Turbo self-contained air conditioning system. Featuring a rust-free molded composite drain pan, condensate water is rapidly removed at one of two easy-to-plumb drain locations. The pan also has innovatively designed anti-slosh ridges and "positive flow" channels to ensure condensate does not spill even in the roughest seas.

For improved installation ease and flexibility, the enclosed blower motor eliminates overhang and the blower can be rotated 270° with a single adjustment screw. The unit's unique inlet ring is designed to optimize air flow and ensure that the height of the unit does not increase when the blower rotates. The fully insulated, high-velocity blowers are quiet and efficient.

Experience better noise reduction with the TurboVap Series' built-in cushioning system which minimizes vibration to the deck. Additionally, the innovative mounting clips utilize vibration isolators.

TurboVap units can be paired with condensers that use either R-22 or R-417A refrigerants. See the Emerald Series of TurboVaps and condensers for a complete split system that uses R-410A refrigerant.



The rust-free composite drain pan reduces standing water up to 85%, thanks to "positive-flow" drain channels. These channels also help prevent spilling and sloshing in rough seas.



Optional lineset extensions for discharge and suction are available for all TurboVap models.

### Key Benefits

- Up to 28% reduced amperage
- Up to 85% reduction in standing water in the drain pan
- Up to 14% increase in cooling capacity
- Up to 15% lighter
- Up to 17% reduction in height
- Up to 19% increased air flow CFM
- Rust-free composite drain pan
- Drain pan features anti-slosh, "positive-flow" drain channels for no spills and rapid removal of condensate
- Up to 15 minutes faster to install
- Single adjustment screw for 270° of blower rotation
- High-velocity (HV) fully-insulated blowers are rotatable
- Vibration-isolation mounts reduce noise and vibration
- 115V and 230V models
- Can be used with R-22 or R-417A condensers

**Cruisair**®

by Dometic GROUP

# Specifications for TurboVap Series Evaporators


Model <sup>(1)</sup>	TV4	TV6	TV8	TV10	TV12	TV16
Capacity (BTU/h)	4000	6000	8000	10000	12000	16000
Voltage @ 50/60Hz ±Ph (V)	115 230	115 230	115 230	115 230	115 230	115 230
Full Load Amps (FLA) Cool (A)	0.82 0.41	0.82 0.41	1.56 0.83	1.14 0.61	1.14 0.61	1.61 0.78
Max. Circuit Breaker (A)	5	5	5	5	5	5
Min. Circuit Ampacity (A)	2	1	2	1	2	1
Height-Coil (in/mm) <sup>(2)</sup>	10.8/275	10.8/275	10.8/275	12.6/321	12.6/321	13/331
Height-Blower (in/mm) <sup>(2)</sup>	10.8/275	10.8/275	11.4/290	12.6/321	12.6/321	13.6/346
Width (in/mm) <sup>(2)</sup>	12.3/313	12.3/313	12.3/313	14.3/364	14.3/364	14.3/364
Depth (in/mm) <sup>(2)</sup>	9.5/242	9.5/242	9.4/239	10.4/265	10.4/265	11.6/295
Min. Supply Air Gille Size (sq.in/sq.cm)	4/102	4/102	5/127	6/153	6/153	7/178
Min. Supply Air Gille Size (sq.in/sq.cm)	32/207	32/207	48/310	60/388	70/452	81/523
Min. Return Air Gille Size (sq.in/sq.cm)	64/413	64/413	80/517	110/710	130/839	160/1033
Net Weight (lbs/kg) <sup>(3)</sup>	10.5/4.8	11/4.1	13.9/6.4	14/6.4	17.5/7.1	19.8/8.1
Gross Weight (lbs/kg) <sup>(3)</sup>	18/8.2	19/8.7	20.75/9.5	22/9.1	25/11.4	28.25/12.9

<sup>1</sup> Add 115V or 230V to the model number for 115V and 230V units, respectively.

<sup>2</sup> All dimensions ± 0.30 in. (8 mm).

<sup>3</sup> All weights ± 10%

## Dimensions

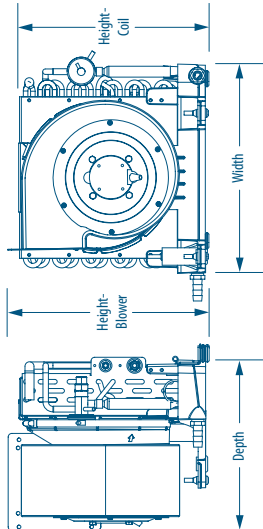

### DOMETIC MARINE DIVISION

2000 N. Andrews Ave. | Pompano Beach, FL 33069 USA | Tel. 954-973-2477 | Fax: 954-979-4414  
 www.Dometic.com/Marine | MarineSales@DometicUSA.com

### 24/7 TECH SUPPORT FOR UNITED STATES & CANADA:

8:00 AM to 5:00 PM Eastern Time: 800-542-2477  
 After hours and weekends: 888-440-4494

### INTERNATIONAL SALES & SERVICES

Europe & the Middle East: Call +44(0)870-330-6101  
 For all other areas visit our website to find your nearest distributor.

L-2695A Rev. 20120803

Specifications and availability subject to change without notice.

Dealer

