

CHCG Series Compact Modular Chillers

Compact Modules In An Enclosed Design



CHCG20Z shown with the electrical box mounted to the top (standard).

Marine Air's Chiller Compact series is ideal for larger boats in the 45-70 ft. (15-20 m) range. Available in capacities of 16,000 and 20,000 BTU/hr, the Chiller Compact uses circulated water in a closed loop in place of copper refrigerant tubes. The innovative, space-saving compact base of the Chiller Compact was designed to allow individual modules to be multiplexed to provide precise capacity requirements for any application.

The new CHCG series is engineered to maximize the impressive performance of R-410A, a proven and environmentally safe refrigerant. CHCG chillers feature the same footprint as the older-style CHCs, and the chilled water, seawater, and drain connection locations are also the same, making it an ideal "drop-in" replacement.

Featuring high-efficiency components that offer maximum performance, Chiller Compact units have hermetically sealed compressors and custom-fabricated condenser coils constructed of spiral-fluted cupronickel for maximum heat transfer and high corrosion resistance.

The improved sensor location provides better sensor response time. This makes the safeties and the operational controls more responsive and effective while still leaving space for all water connections to be double-hose clamped.

Additional improvements include no interior foam to facilitate easier servicability, and performance and efficiency is equal to or better than older style CHCs. The optional SmartStart™ soft starter can be included in the electrical box to reduce compressor in-rush current.

The electrical box comes installed on top of the unit. However, it has a short harness and hardware allowing the installer to easily move it to the rear of the unit if desired.



The electrical box can be mounted on the rear of the unit for better installation flexibility.



Extended drain pan collects and removes condensate that drips from water connections.



The electrical box has space for the optional SmartStart soft starter.

Key Benefits

- Compact footprint for installation flexibility
- Single modules can produce up to 20,000 BTU/hr; 24,000 BTU/hr models coming soon
- Up to six modules can be multiplexed for larger capacities
- Thermodynamically-matched components assure maximum performance
- High-efficiency rotary or scroll compressors
- Engineered to maximize the performance of R-410A, an environmentally safe refrigerant
- Spiral-fluted cupronickel condenser coil provides maximum heat transfer and corrosion resistance
- Includes hot-gas bypass for heat mode operation in water temperatures as low as 40°F
- Digital Diagnostic Controller (DDC) monitors and protects the system
- Charged, tested, and leak checked at the factory
- Meets or exceeds applicable ABYC and US Coast Guard regulations, CE directives, and general Air Conditioning and Refrigeration (ARI) standards
- Charge Guard protection provides sealed access ports, ensuring environmental protection and chiller module integrity

Special Options

- SmartStart™ soft starter reduces compressor start-up amps by 65%




Specifications for CHCG Series Compact Modular Chillers

Model	CHCG16	CHCG20	CHCG24
Capacity (BTU/h)	16000	20000	24000
Voltage (V)	115	230	220
Cycle (Hz)/Phase (Ph)	60/1	60/1	50/3
Full Load Amps (FLA) Cool (A)	9.7	4.9	60/3
Full Load Amps (FLA) Heat (A)	14.1	5.8	8.5
Locked Rotor Amps (LRA) (A)	62	34	9.9
Max. Circuit Breaker (A)	40	15	20
Min. Circuit Ampacity (A)	23	11	12
Refrigerant Type	410A	410A	410A
Max. Height (in/mm) ⁽¹⁾	13/331	12.75/324	13/331
Max. Width (in/mm) ⁽²⁾⁽³⁾	11.5/293	13.75/350	16.38/417
Depth-Drain Pan (in/mm) ⁽²⁾⁽⁴⁾	18/458	11.5/293	13/331
Max. Depth (in/mm) ⁽²⁾⁽²⁾	21.3/542	18/458	21.3/542
Drain Connection Size (in/mm)	1/2 /13	1/2 /13	1/2 /13
Drain Connection Type	HB	HB	HB
Seawater Flow (gpm/lpm)	4/15.2	5/18.1	6/22.8
Seawater Pressure Drop (PSI/kPa)	1.6/11.1	3.6/24.9	4.6/31.8
Seawater Inlet Connection (in/mm)	3/8 /16	3/8 /16	3/8 /16
Chilled Water Flow (gpm/lpm)	4/15.2	5/18.1	6/22.8
Chilled Water Pressure Drop (PSI/kPa)	2/13.8	3.6/24.9	7.4/51.1
Chilled Water Connection Size (in/mm)	3/8 /16	3/8 /16	3/8 /16
Net Weight (lbs/kg)	53.5/24.3	55.5/25.2	55/24.1
Gross Weight (lbs/kg)	74/33.6	75.5/34.3	75/34.1
			107.9/48.1
			108.5/49.3
			130/58.1
			92.5/41.1
			115/52.2

¹ All dimensions ± 0.25 in. (6 mm).

² Depth when the electrical box is mounted to the side of the unit.

³ Add 1.0 in. (26 mm) to width or depth for mounting brackets, depending on their rotation.

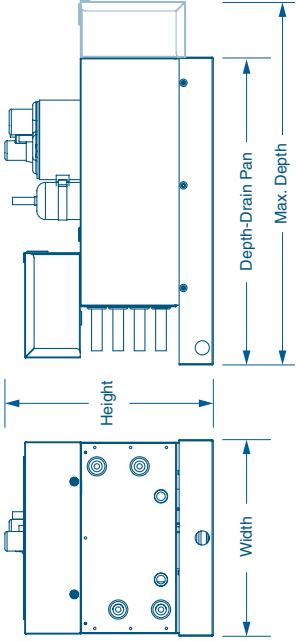

Dimensions

DOMETIC MARINE DIVISION
 2000 N. Andrews Ave. Ex. | Pompano Beach, FL 33069 USA | Tel. 954-973-2477 | Fax: 954-979-4414
www.Domestic.com/Marine | MarineSales@DomesticUSA.com

24/7 TECH SUPPORT FOR UNITED STATES & CANADA:
 8:00 AM to 5:00 PM Eastern Time: 800-542-2477
 After hours and weekends: 888-440-4494

INTERNATIONAL SALES & SERVICES
 Europe & the Middle East: Call +44(0)870-330-6101
 For all other areas visit our website to find your nearest distributor.

L-3263 Rev. 20140509

Specifications and availability subject to change without notice.

Dealer

