AGM SlimLine series




	AGM-SL 12/150	AGM-SL 12/185
Product code	63001500	63001850
Nominal voltage	12 V	12 V
Capacity C20*	150 Ah	185 Ah
CCA to DIN	610 A	750 A
CCA to SAE	1020 A	1250 A
Max. outer dimensions (incl. terminals and grip handles),		
lxbxh in mm/inch	560x110x280 / 22x4.3x11	560x126x280 / 22x5x11
Weight	40.5 kg / 89 lbs	51.2 kg / 113 lbs

^{*} C20 = battery capacity at a discharge time of 20 hours, till 1.75 V per cell.

- Ideal universal battery; also for starter functions.
- Compressed AGM technology.
- Saves up to 15% in volume.
- Saves up to 15% in weight.
- Miniscule footprint; 2x 185 Ah for a 200 Ah battery footprint.
- Two-year warranty.



Get the most out of your batteries with a battery monitor

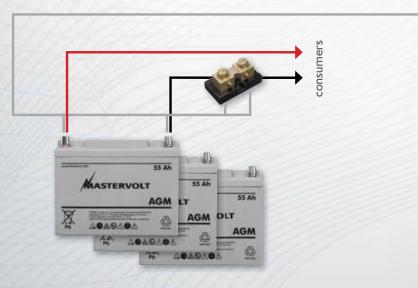



The Masterlink BTM-III battery monitor provides an accurate indication of the current, amperage, remaining time and remaining capacity of battery bank I, and the current and estimated capacity of battery banks 2 and 3. The built-in microprocessor calculates the remaining capacity and stores historic data. Product code 70403163.