

4204 DC Twenty-Three Branch Circuits With Main

4204 DC Twenty-Three Branch Circuits With Main

GENERAL FEATURES & BENEFITS

- Completely pre-wired to reduce installation time

- High accuracy rear mounted analog meters. Digital meters are optional.

- Over 2000 interchangeable function labels available.

- Panel face is 1/8" corrosion resistant aluminum coated with two-part polyurethane.

- Panel mounted, isolated hot, neutral, and safety ground bus bars on AC breaker panels.

- LED Indicators provided on all Premier Line Panels

- Hydraulic/magnetic, trip free Circuit Breakers.

- Voltage: 12V - standard. 24V and 32V optional.

- Main Breakers: 100 AMPS - standard. Also available in 50, 60, or 80 AMPS. Main breaker provides 3000 AMP interrupt capacity rating.

- Branch Circuits: Available in 5, 10, 15, 20, 25, 30, 40, and 50 AMPS.


- Metering: 8-16VDC expanded scale Voltmeter and 0-100 DCA externally shunted Ammeter - standard. Other scales and digital meters are available.

- Generator: Generator preheat switch, and stop/start switch are both Euro-styled rocker switches.

- Load Selection: Parallel Bus A+B switch allows two isolated hot and neutral buses to be supplied.

- Dimensions: 17 3/4" W X 7 3/4" H X 3 1/2" D.

- Color: Black is standard. Optional: White, Gray and Beige.

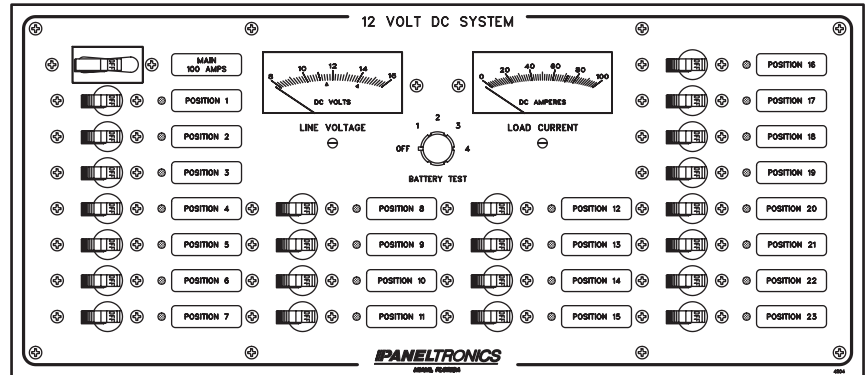

4204