


# 4312 & 4313 AC High AMP Main Circuit Breaker Panels


## 4312 AC High AMP Main Circuit Breaker Panel with Two Inputs 120 / 240 VAC & 4313 AC High AMP Main Circuit Breaker Panel with Three Inputs 120 / 240 VAC

### GENERAL FEATURES & BENEFITS

- Completely pre-wired to reduce installation time
- Over 2000 Interchangeable function labels available
- Panel is 1/8" corrosion resistant aluminum coated with two-part polyurethane.
- Hydraulic/magnetic, trip free Circuit Breakers. UL recognized (UL-1077)
- Panel mounted, isolated hot, neutral, and safety ground bus bars on AC breaker panels.
- Dimensions: 17 3/4" W x 8 1/4" H x 3 3/4" D.
- Color: Black is standard. Optional: White, Gray and Beige.
- Voltage and Current: 50 AMPS, 240 VAC-60 HZ USA is standard. Other current ratings, voltages, and frequencies available.
- Main Breakers: Three pole 50 AMPS are standard. Three pole 30, 40, 60, 80, and 100 AMPS; two pole 16 AMPS reverse polarity pole; two pole 30 AMPS plus reverse polarity pole; and two pole 16, 30, 40, 50, 60, 80, and 100 AMPS are optional. Main breaker provides a 5000 AMPS capacity rating.
- Sliding Gate: The optional sliding gate mechanism permits the safe selection of not more than one source of power.

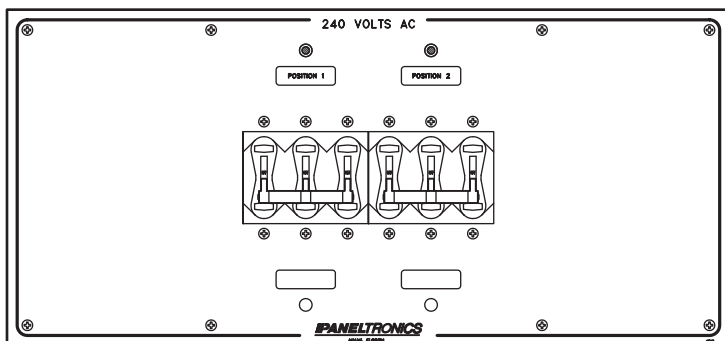

4312

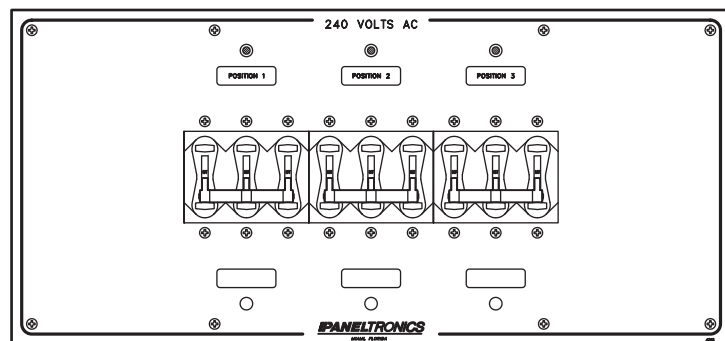

4313