


5304 AC Shore And Generator Mains

5304 AC Shore And Generator Mains 120 VAC 60 HZ, 240 VAC 60 HZ, (or 240 VAC 50 HZ)

GENERAL FEATURES & BENEFITS

- Completely pre-wired to reduce installation time
- Panel mounted, isolated positive, negative, and grounding bus bars on DC breaker panels.
- Over 2000 interchangeable function labels available
- Panel is 1/8" corrosion resistant aluminum coated with two-part polyurethane.
- Hydraulic/magnetic, trip free Circuit Breakers. UL recognized (UL-1077)
- Voltage and Shore Cord Current: 50 AMPS, 240 VAC-60 HZ USA standard. Also available in 30 AMPS, 120 VAC-60 HZ USA; 50 AMPS, 120 VAC-60 HZ USA; 16 AMPS, 240 VAC-50 HZ.
- Main Breakers: Shore: 50 AMP, 240 VAC, 60 HZ, three pole main breaker is standard. 30 AMPS, 120 VAC, 60 HZ USA; 50 AMPS, 120 VAC, 60 HZ USA; and 16 AMPS, 240 VAC, 50 HZ. Generator. 50 AMP, 240 VAC, 60 HZ, three pole main breaker - standard. Other options 240 VAC, 60 HZ ratings are three pole breakers. 120 VAC, 60 HZ and 240 VAC, 50 HZ mains are two pole breakers.
- Metering: 0-150 VAC scale Voltmeter and 0-50 ACA scale Ammeter are standard. Other analog scales and digital meters are available.
- Generator: Euro-styled rocker switches on both preheat switch, and stop/start switches.
- Dimensions: 11" W x 9 3/4" H x 3 1/2 " D.

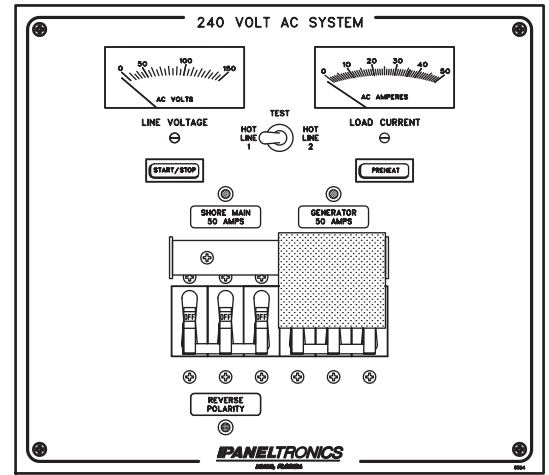

5304