


## 5307 AC Dual Shore and Generator Mains 240 VAC 60 HZ

### GENERAL FEATURES & BENEFITS

- Completely pre-wired to reduce installation time
- High accuracy rear mounted meters. Digital meters are optional.
- Panel mounted, isolated hot, neutral, and safety ground bus bars on AC breaker panels.
- Over 2000 interchangeable function labels available. Labels are illuminated on Premier line panels.
- Panel is 1/8" corrosion resistant aluminum coated with two-part polyurethane.
- Hydraulic/magnetic, trip free Circuit Breakers. UL recognized (UL-1077)
- DC Voltage: 12V - standard. Available in 24V and 32V.
- Voltage and Shore Cord Current: 50 AMPS, 240 VAC, 60 HZ USA is standard.
- Main Breakers: Shore: 50 AMP, 240 VAC, 60 HZ, three pole main breaker is standard.
- Generator: 50 AMP, 240 VAC, 60 HZ, three pole main breaker - standard. Other 240 VAC, 60 HZ ratings are available.
- Metering: 0-150 VAC scale Voltmeter and 0-50 AGA scale Ammeter - standard. Other analog scales and digital meters available.
- Branch Circuits: Twenty-one circuits. 5, 10, 15, 20, 25, 30, 40, and 50 AMP breakers are available. One circuit. 50, 60, 80, or 100 AMP providing 3000 AMP interrupt capacity rating.
- Dimensions: 11" W x 9 3/4" H x 3 1/2" D.

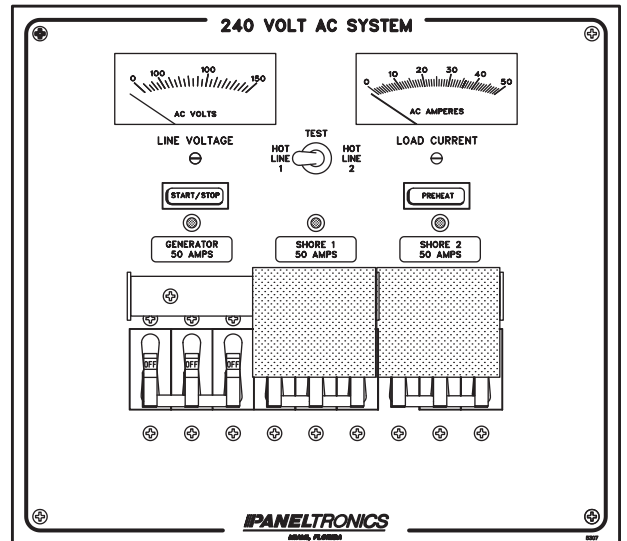

5307