



SSI095FC



SSI095FD



SSI095NF

SSI095

FEATURES

PERFORMANCE


- High output daily ice rate of up to 23 lbs and storage of up to 12 lbs of crescent ice (1/2" W x 3/4" H x 2-1/2" L)
- Conserves energy by using less electricity than a 75-watt light bulb
- Conserves water by using 2-3/4 gallons of water to produce approximately 23 lbs of ice
- No drain required makes it easy and inexpensive to install and requires only a 1/4" outside diameter water line
- Manual defrost maximizes ice making potential
- 220 volt model available with a 4 – 6 week order lead time

INTERIOR / EXTERIOR

- Full stainless steel cabinet helps withstand tough marine environments
- Corrosion resistant marine grade hardware provide better product longevity in harsh environments
- Aluminum framed door with stainless steel panel and durable stainless handle weathers outdoor elements
- Travel latch included for optimized, hygienic and safe at-sea travel and storage and for single-handed operation


INTEGRATION

- Field reversible door with zero clearance door swing simplifies installation
- Multiple flange options include no flange, 1/2" flange flush to cabinet and 1/2" flange flush to door allow for optimized installation flexibility
- No additional clearance around sides, top or rear of unit is needed for ventilation
- Sleek and contemporary look provides a very clean, high-end aesthetic
- Do not obstruct front grille air flow
- For proper installation and cut-out dimensions, see backside for details

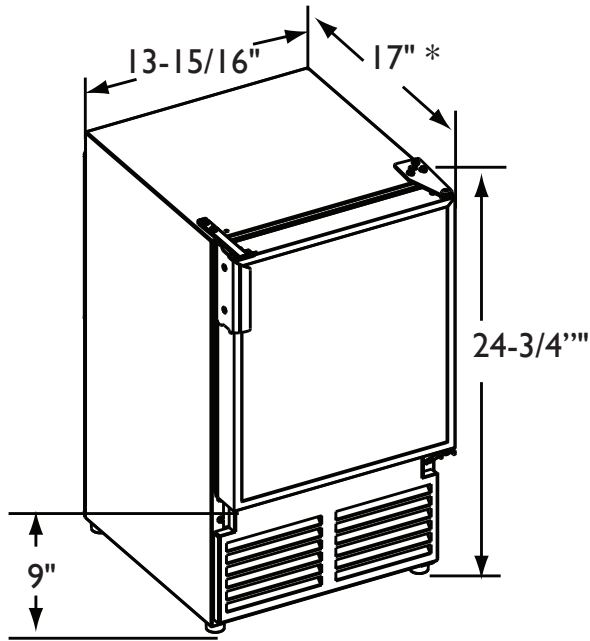

SSI095 NF Model

* Add 1-1/2" for water line clearance

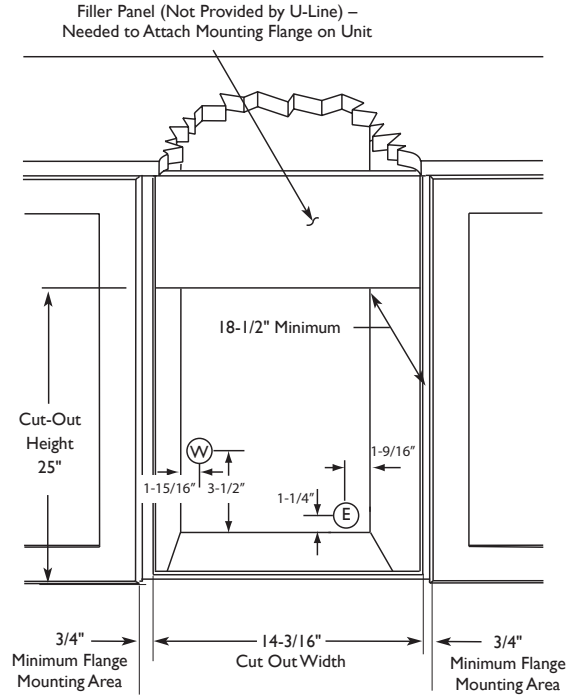

Legend: E - Electrical W - Water

DIMENSIONS AND SPECIFICATIONS

OVERALL DIMENSIONS

Height 24-3/4" (62.8)
 Width 13-15/16" (35.5)
 Depth 17" (43.2)

Shipping weight:

Black and white models 67 lbs (30.4 kg)

Running amps 2.5
 Maximum start-up amps 18.0
 Amps pertain to voltage rating 110/115 volt, 60 Hz
 Approximate daily ice production Up to 23 lbs
 Ice storage Up to 12 lbs

Optional in 220/230 voltage, 50/60 Hz
 On the 220/230 volt models, amps are decreased by approximately 50 percent.

SSI095	
Stainless 110V	ULN-SSI095NF-03
Stainless 220V	ULN-SSI095NF-20
Stainless 110V	ULN-SSI095FC-03
Stainless 220V	ULN-SSI095FC-20
Stainless 110V	ULN-SSI095FD-03
Stainless 220V	ULN-SSI095FD-20

Please visit www.u-line.com for installation guide.

All specifications are subject to change without notice.