




AC stainless steel refrigerators and freezers > external cooling units > C130LX - C130LXAC

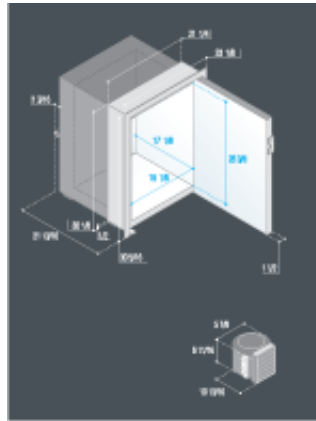

Flush flange (standard)

Model

C130LX - C130LXAC

Volume

Refrigerator compartment (Cu Ft)

4.7

Freezer compartment (Cu Ft)

0.6

Freezer internal size

Height (Inches)

4.7

Width (Inches)

16.5

Depth (Inches)

13.4

Weight

Lbs

68.3

Technical features (dc)

Power Voltage (V)

12/24

Power consumption (W)

43

Current consumption 12vdc (A)

3.78

Technical features (ac)

Power Voltage (V)

100-240 - 50/60 Hz

Power consumption (W)

43

Current consumption 115Vac (A)

0.57

Internal cooling unit

External cooling unit

•

Standard - optional

Interchangeable door

standard

Internal light

standard

Door finish

Stainless steel

standard

Opening type

Front opening

•

Top loading

Mounting options

Flush flange
standard

Surface flange

Bottom trim piece
optional

Vitrifrigo America LLC - 2200 NW 32 ST. Suite 1200 - Pompano Beach, FL 33069 United States - by [creso](#)