




## AC stainless steel refrigerators and freezers > external cooling units > C42LX-C42LXAC

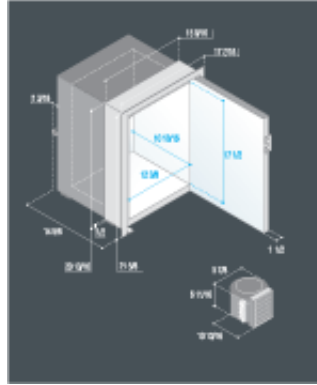

Flush flange (standard)

### Model

**C42LX - C42LXAC**

### Volume

Refrigerator compartment (Cu Ft)

1.4

Freezer compartment (Cu Ft)

0.1

### Freezer internal size

Height (Inches)

2.8

Width (Inches)

9.7

Depth (Inches)

8.3

### Weight

Lbs

37.5

### Technical features (dc)

Power Voltage (V)

12/24

---

---

Power consumption (W)

31

---

---

Current consumption 12Vdc (A)

2.58

---

---

**Technical features (ac)**

---

---

Power Voltage (V)

100-240 - 50/60 Hz

---

---

Power consumption (W)

31

---

---

Current consumption 115Vac (A)

0.44

---

---

Absorption power (kW 24h )

0.26

---

---

Internal cooling unit

---

---

External cooling unit

•

---

---

**Standard - optional**

---

---

Interchangeable door

standard

---

---

Internal light

---

---

**Door finish**

---

---

Stainless steel

standard

---

---

**Opening type**

---

---

Front opening

•

---

---

Top loading

---

---

**Mounting options**

---

---

Flush flange

standard

---

---

Surface flange

---

---

Bottom trim piece

optional

Vitrifigo America LLC - 2200 NW 32 ST. Suite 1200 - Pompano Beach, FL 33069 United States - by [creso](#)