




**AC stainless steel refrigerators and freezers > internal cooling units > C62iX - C62iXAC**

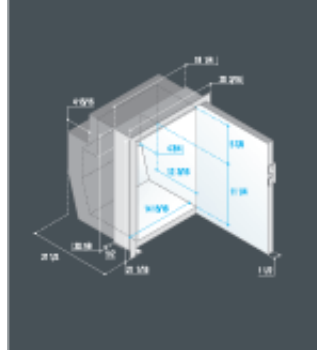

Flush flange (standard)

**Model**

C62iX - C62iXAC

**Volume**

Refrigerator compartment (Cu Ft)

2

Freezer compartment (Cu Ft)

0.19

**Freezer internal size**

Height (Inches)

3.5

Width (Inches)

9.8

Depth (Inches)

8.1

**Weight**

Lbs

45

**Technical features (dc)**

Power Voltage (V)

12/24

Power consumption (W)

40

Current consumption 12Vdc (A)

3.38

**Technical features (ac)**

Power Voltage (V)

100-240 - 50/60 Hz

Power consumption (W)

40

Current consumption 115Vac (A)

0.53

Internal cooling unit

•

External cooling unit

**Standard - optional**

Interchangeable door

standard

Internal light

standard

**Door finish**

Stainless steel

standard

**Opening type**

Front opening

•

Top loading

---

---

**Mounting options**

Flush flange  
standard

---

Surface flange

---

Bottom trim piece  
optional

---

Vitrifigo America LLC - 2200 NW 32 ST. Suite 1200 - Pompano Beach, FL 33069 United States - by [creso](#)