




## AC stainless steel refrigerators and freezers > external cooling units > C75LX - C75LXAC

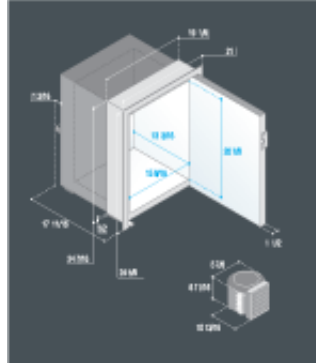

Flush flange (standard)

### Model

**C75LX - C75LXAC**

### Volume

Refrigerator compartment (Cu Ft)

2.6

Freezer compartment (Cu Ft)

0.4

### Freezer internal size

Height (Inches)

4.1

Width (Inches)

15.4

Depth (Inches)

9.8

### Weight

Lbs

50.7

**Technical features (dc)**

Power Voltage (V)

12/24

Power consumption (W)

40

Current consumption 12Vdc (A)

3.38

**Technical features (ac)**

Power Voltage (V)

100-240 - 50/60 Hz

Power consumption (W)

40

Current consumption 115Vdc (A)

0.53

Absorption power (kW 24h )

0.35

Internal cooling unit

External cooling unit

•

**Standard - optional**

Interchangeable door

standard

Internal light

standard

**Door finish**

Stainless steel

standard

---

**Opening type**

---

Front opening

---

- 
- 

Top loading

---

---

**Mounting options**

---

Flush flange

---

standard

---

Surface flange

---

Bottom trim piece

---

optional

---

Vitrifigo America LLC - 2200 NW 32 ST. Suite 1200 - Pompano Beach, FL 33069 United States - by [creso](#)